

STEINEL[®]
PROFESSIONAL




At home on the world's roofs.

Hot air tools from **STEINEL**

The art of understanding heat.

For hot air tools, producing high temperatures is a must; always being in control of them is the icing on the cake. To score top marks on both counts, STEINEL only uses top-quality, long-lasting components developed by its team of experts, and puts them together with meticulous care. This is where our customers benefit from over 30 years of experience, in developing and manufacturing hot air tools, to give them a product that has been cleverly engineered in every last detail, only delivering heat where it is needed; across the board.

Thanks to its particularly robust design as well as the specially sealed and protected electronics, its fine dust filter and the heavy-duty H07 power cord, it is the safe, dependable helper on any construction site. In short: the best hot air tool we have ever developed.

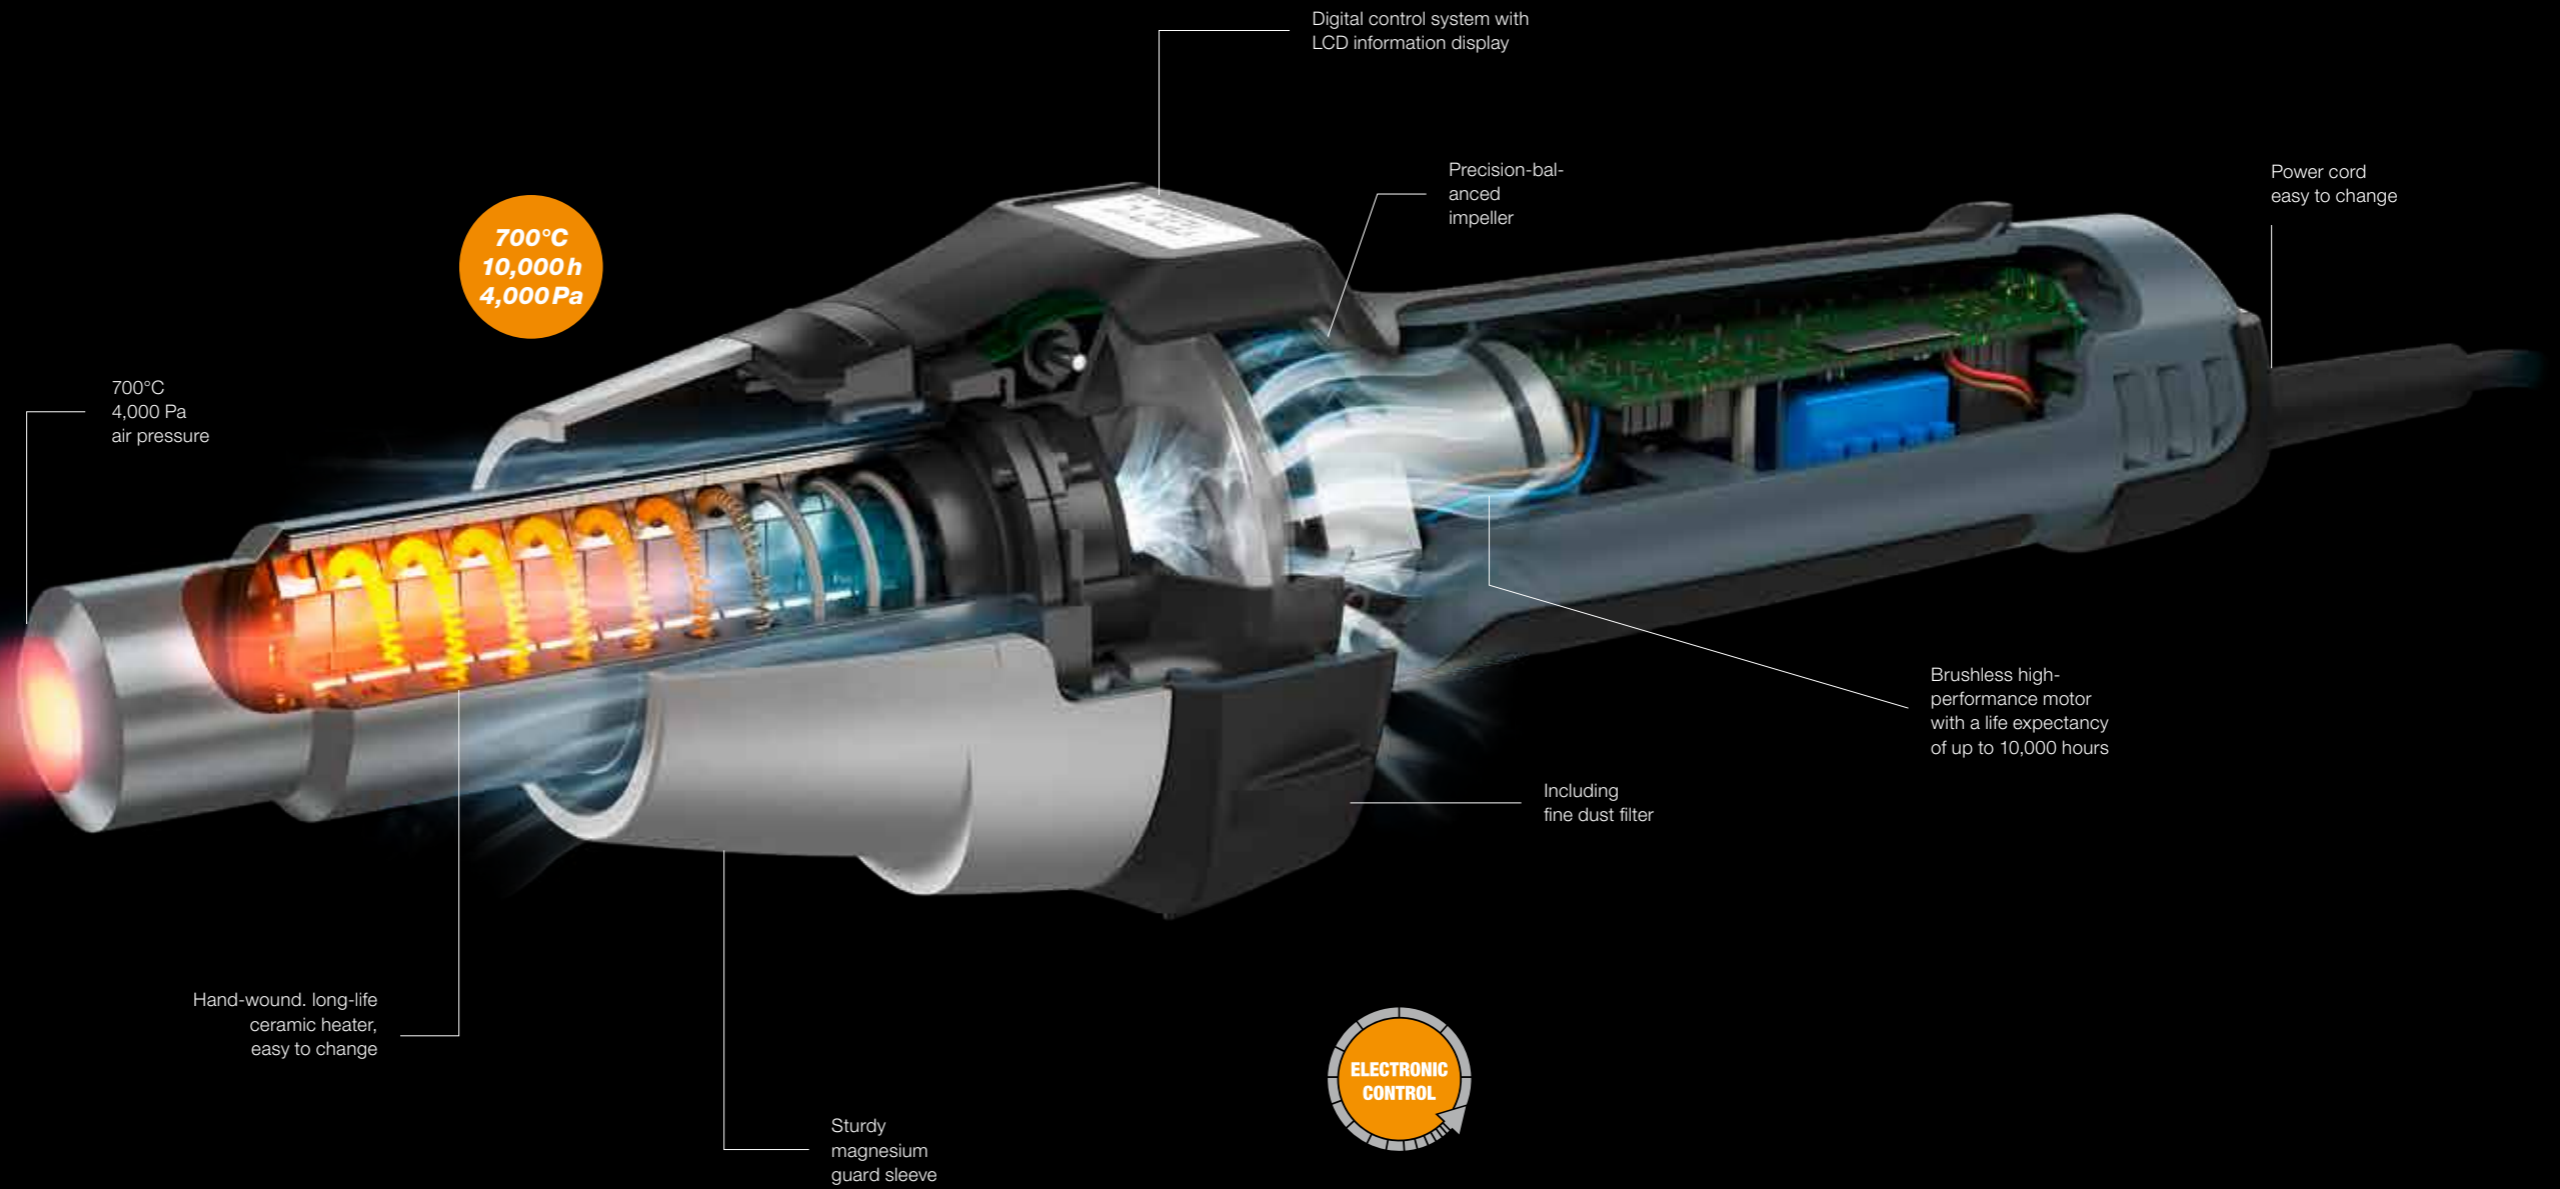

Simply better. Simply for you.
Hot air tool **HG 2620 E** with brushless motor.

For anyone settling for nothing but the best when it comes to performance and precision: delivering 2300 W of power, the HG 2620 E hot air tool is easily controlled by a joystick, in precise 10°C steps between 50°C – 700°C, while letting you set 4 individually tailored programmes. The temperature is indicated on the LCD display where it is easy to read at any time. Infinitely varying the airflow rate between 150 – 500 l/min is just as easy. At full air-pressure power of 4,000 Pa. The powerful brushless motor rewards our flagship tool with a working life of over 10,000 hours.

Accessories for HG 2620 E



Flat angled nozzle, 20x2mm
EAN 4007841 092115



Flat angled nozzle, 20x2mm, straight
EAN 4007841 013240



Flat angled nozzle 20x2mm, 100°
EAN 4007841 007812



Flat angled nozzle 30x2mm, 60°
EAN 4007841 011925



Flat angled nozzle, 40x2mm
EAN 4007841 092016



Flat nozzle, 40 x 2 mm, perforated
EAN 4007841 009083



Flat nozzle, 60 x 2 mm, for bitumen
EAN 4007841 009090



Silicone pressure roller, 40 mm
EAN 4007841 006785
(one-arm roller mounted on ball bearings)



Teflon pressure roller, 40mm
EAN 4007841 034122
(one-arm roller mounted on ball bearings)



Brass pressure roller, 7 mm
EAN 4007841 034115



Tarpaulin shears
EAN 4007841 010423
(suitable for right-handed and left-handed users)



Teflon fillet weld tool
EAN 4007841 011833



Seam tester
EAN 4007841 034986



LCD information display always in view



Optional cool-down setting



Single-hand operation by joystick



Magnesium guard sleeve, plug-in heating element



Residual heat indicator



Restart protection



Ergonomic soft grip handle



Replaceable power cord

Technical Specifications

Output: 2300 W
Temperature: 50 – 700°C
Airflow rate: 150 – 500l/min
Air pressure: 4,000 Pa
Motor: brushless
Motor life: 10,000 hours
Temperature setting: infinitely variable in 10°C steps via joystick
Heating element: ceramic heating element
Thermal cutout: yes
Protection class (without earth terminal): II
Dimensions (L x W x H): 358 x 91 x 95 mm
Power supply: 220 – 230 V, 50/60 Hz
Weight: 0.840 kg (without power cord)

Ordering details

EAN 4007841 008338 (folding box)
EAN 4007841 351809 (case)



The innovation on flat roofs.
HG ROOF automatic welding machine.

The new, compact and extremely user-friendly HG Roof one-man automatic welding machine produces perfectly sealed roof surfaces with its 2000 W hot air tool, high pressing force and welding width of up to 40 mm. The machine provides the capability of welding close to the edge as well as automatic welding as close as 15cm to parapet corners. This minimises manual finishing work. Speed is infinitely variable. The handle can be moved to the left and right, enabling the automatic welding machine to travel forwards and backwards.



Welding as close as 8 cm to the edge on straight sides.



Includes compact transportation box



Includes 3 additional weights



Includes starting plate



Includes wire brush

Brushless motor for long life

Welding width up to 40mm

Handle can be moved to the left and right

Sturdy stainless-steel housing

Infinitely variable speed

High pressing force



Technical Specifications

Output: 2000 W
 Welding temperature: 50–620°C
 (digital control of temperature with temperature indicated on the display)
 Hot air tool motor: brushless
 Weight: approx. 14 kg + 3 × 1.1 kg additional weights
 Speed: 1–5 m/min
 Welding width: up to 40 mm
 Features: automatic welding machine can be moved forwards and backwards, welding as close as 15 cm to parapet corners, including soft start and safety shut-off switch
 Suitable for thermoplastic roof membranes

Items included

HG ROOF, transportation box, starting plate, 3 additional weights and wire brush

Ordering details

EAN 4007841 058357
 EAN 4007841 064136 HG ROOF Resitrix conversion kit

