

ClassicBond® the original EPDM

The Numbers Do Not Lie

- EPDM flat roof membranes have a life expectancy of at least 50 years.

- Half-century track record of performance and durability.

- Manufactured by worlds largest EPDM manufacturer

Unrivalled

- Unmatched weatherability

- Flexibility

- Economical

- Safe – Heat free installation.

- Pressure-sensitive accessories available for virtually any penetration or detail.

For You

- Wide variety of sheet widths – To suit each individual project and customer.

- Choice of Sheet thicknesses

- Seamless – Completely Reliable

ClassicBond EPDM Roofing system comes with a range of Pressure Sensitive (PS) tapes, the following pages give a brief description of their uses and benefits they can offer. All Pressure Sensitive tapes and accessories must be installed with ClassicBond EPDM Primer.

75mm Pressure Sensitive Seam Tape

ClassicBond PS Seam Tape manufactured to precise width and thickness criteria with a clear poly backing for easier on site application.

ClassicBond seam tape offers over 30% greater peel and sheer strength when compared to market rivals. This tape is designed for use with ClassicBond EPDM roofing systems to fuse the EPDM membranes together resulting in long term seam strength.

Features

75mm wide by 2.5m long rolls

Excellent long term seam strength

Easy application with clear poly lining

Must be used with ClassicBond EPDM Primer

For full usage details refer to the ClassicBond Installation Manual.



150mm Pressure Sensitive Overlayment Strip

ClassicBond 150mm PS Overlayment Strip used for stripping in metal edging, drip edges, gravel stops and fastening plates. This tape consists of a 1.02mm semi-cured EPDM strip laminated to a 0.89mm fully cured synthetic rubber based pressure sensitive adhesive.

This tape isn't designed to be used for molding around corners, pipes, cover patches for seam joints or other detail installations.


Features

150mm by 30.5m long rolls

Resists tearing, cracking and abrasion in all weather conditions

Used when seaming with 75mm PS tape is not possible

Must be used with ClassicBond EPDM Primer

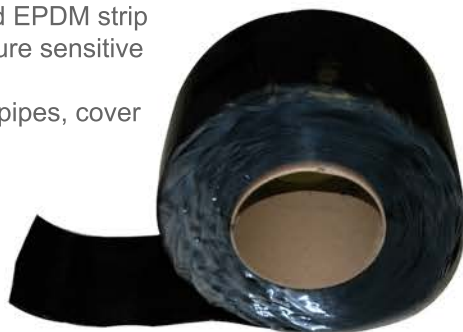

225mm Pressure Sensitive Elastoform Flashing Tape

ClassicBond PS Flashing Tape is easily moulded and highly adaptable to irregular shapes and surfaces. This self curing tape is ideal for flashing and waterproofing of roof details such as pipes, corners, outlets and other penetrations.

Features & Benefits

225mm wide by 15.25m long rolls

Easily adaptable to irregular shapes and surfaces

Easy application with clear poly lining

Must be used with ClassicBond EPDM Primer

For full usage details refer to the ClassicBond Installation Manual.



ClassicBond® the original EPDM

Pressure Sensitive RUSS Strip

In common with most single ply material EPDM will, overtime, try and shrink by up to 10% back to the centre. The base tie in controls the membrane movement and stops the membrane pulling away where the membrane turns up through an angle change. The rest of the movement is accommodated by the ClassicBond membrane and its ability to elongate by over 300%.

ClassicBond PS RUSS (Reinforced Universal Secure Strip) is used to mechanically secure EPDM membranes to the substrate. The strip has tape pre-applied along one edge, and can be installed horizontally or vertically in conjunction with Seam Fastening Plates below the EPDM membrane for additional membrane securement.

Features

Ideal for additional membrane securement as needed
Ideal for perimeter securement and around penetrations

Seam Fastening Plates

Used with RUSS strip to securely clamp the RUSS to the vertical or horizontal surface. Must be used in conjunction with the appropriate fasteners for the substrate.



Pressure Sensitive Pipe Seals

ClassicBond EPDM PS Pipe Seals are available in two sizes, small 15-75mm and large 25-150mm in diameter. ClassicBond pipe seals are cured, pre-moulded EPDM flashings for round flat roof penetrations, pre-applied seam tape to the base and a stainless steel clamping ring.

Features

Pre-applied seam tape on the base of the pipe seal giving fast & simple application.
Ribbed collar for accurate cutting to pipe size
Stainless steel clamping ring
Must be used with ClassicBond EPDM Primer
For full usage details refer to the ClassicBond Installation Manual.



Pressure Sensitive Walkway Pads

ClassicBond walkway pads are designed to be bonded to the membrane in those areas that are exposed to repetitive foot traffic. These non slip pads have a dimpled top surface and pre-applied PS tape on the underside of the mats. It is good roofing practice to install walkways or non slip pads at areas of high traffic or loading e.g. roof hatches, roof ladders, doorways etc. It is also recommended to install walkways where regular maintenance and access to roof top equipment is needed.

Features

Excellent tear and puncture resistance
Non-slip surface
Backed with 75mm PS tape for fast, easy installation
Must be installed with ClassicBond EPDM Primer

